



LUXPOINT® Emergency Downlight - Werner Datasheet



The Emergency Downlight is a high-quality lighting fixture specifically designed for emergencies. It combines functionality, durability, and ease of use to provide reliable illumination when it matters most. Available in two types, Maintain and Non-Maintain, this recessed downlight offers exceptional performance, flexibility, and dependability in emergency lighting situations. Choose this lighting solution for peace of mind, knowing that you have a reliable and versatile option for emergency illumination.”

Benefits

- Flexibility and Convenience
- Precise and efficient
- Enhanced Safety
- Energy-Efficient
- Easy Installation & Maintenance

Applications

- Commercial buildings
- Offices
- Retail spaces
- Corridors
- Stairwells
- Public spaces

LUXPOINT® Emergency Downlight - Werner

Technical Data

Optical Specifications

Wattage	1H	0.5W	0.5W	0.5W	1W	1.3W	1.8W
	3H	0.5W	1W	1.2W	2W	2.5W	3W
Luminous Flux		70lm	100lm	150lm	200lm	300lm	400lm
CCT		6500K					
CRI		80					
SDCM		<6 SDCM					

Electrical and Mechanical Specifications

Input Voltage		220-240V~ 50/60Hz					
Dimensions		Ø84mm x 23mm					
Weight	1H	236g	266g	263g	335g	341g	404g
	3H	266g	329g	338g	445g	545g	584g
Housing		PC					
Diffuser		PC					

System Specifications

Power	AC mains
Function	Non-maintained / Maintained by wiring
Control	Non self-test / Self-test
Installation	Recessed
CHarging Time	24H
Duration	1H / 3H
Operating Temperature	0°C ~ 40°C
Storage Temperature	-10°C ~ 60°C
Environment	Indoor
Safety Approval	Electrical Protection Class II, CE, UKCA, RoHS
Battery	Ni-Cd

Due to the special conditions of manufacturing process of LED, the typical data of technical parameters can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from typical data.


Exceeding maximum ratings for operation voltage will cause hazardous overload and will likely destroy the LED module.

Exceeding maximum ratings for operation and storage temperature will reduce expected life time or destroy the LED module.

Specifications are subject to change without notice. Errors and omission excepted, always make sure to use the most recent release.

LUXPOINT® Emergency Downlight - Werner

Dimension (Unit: mm)

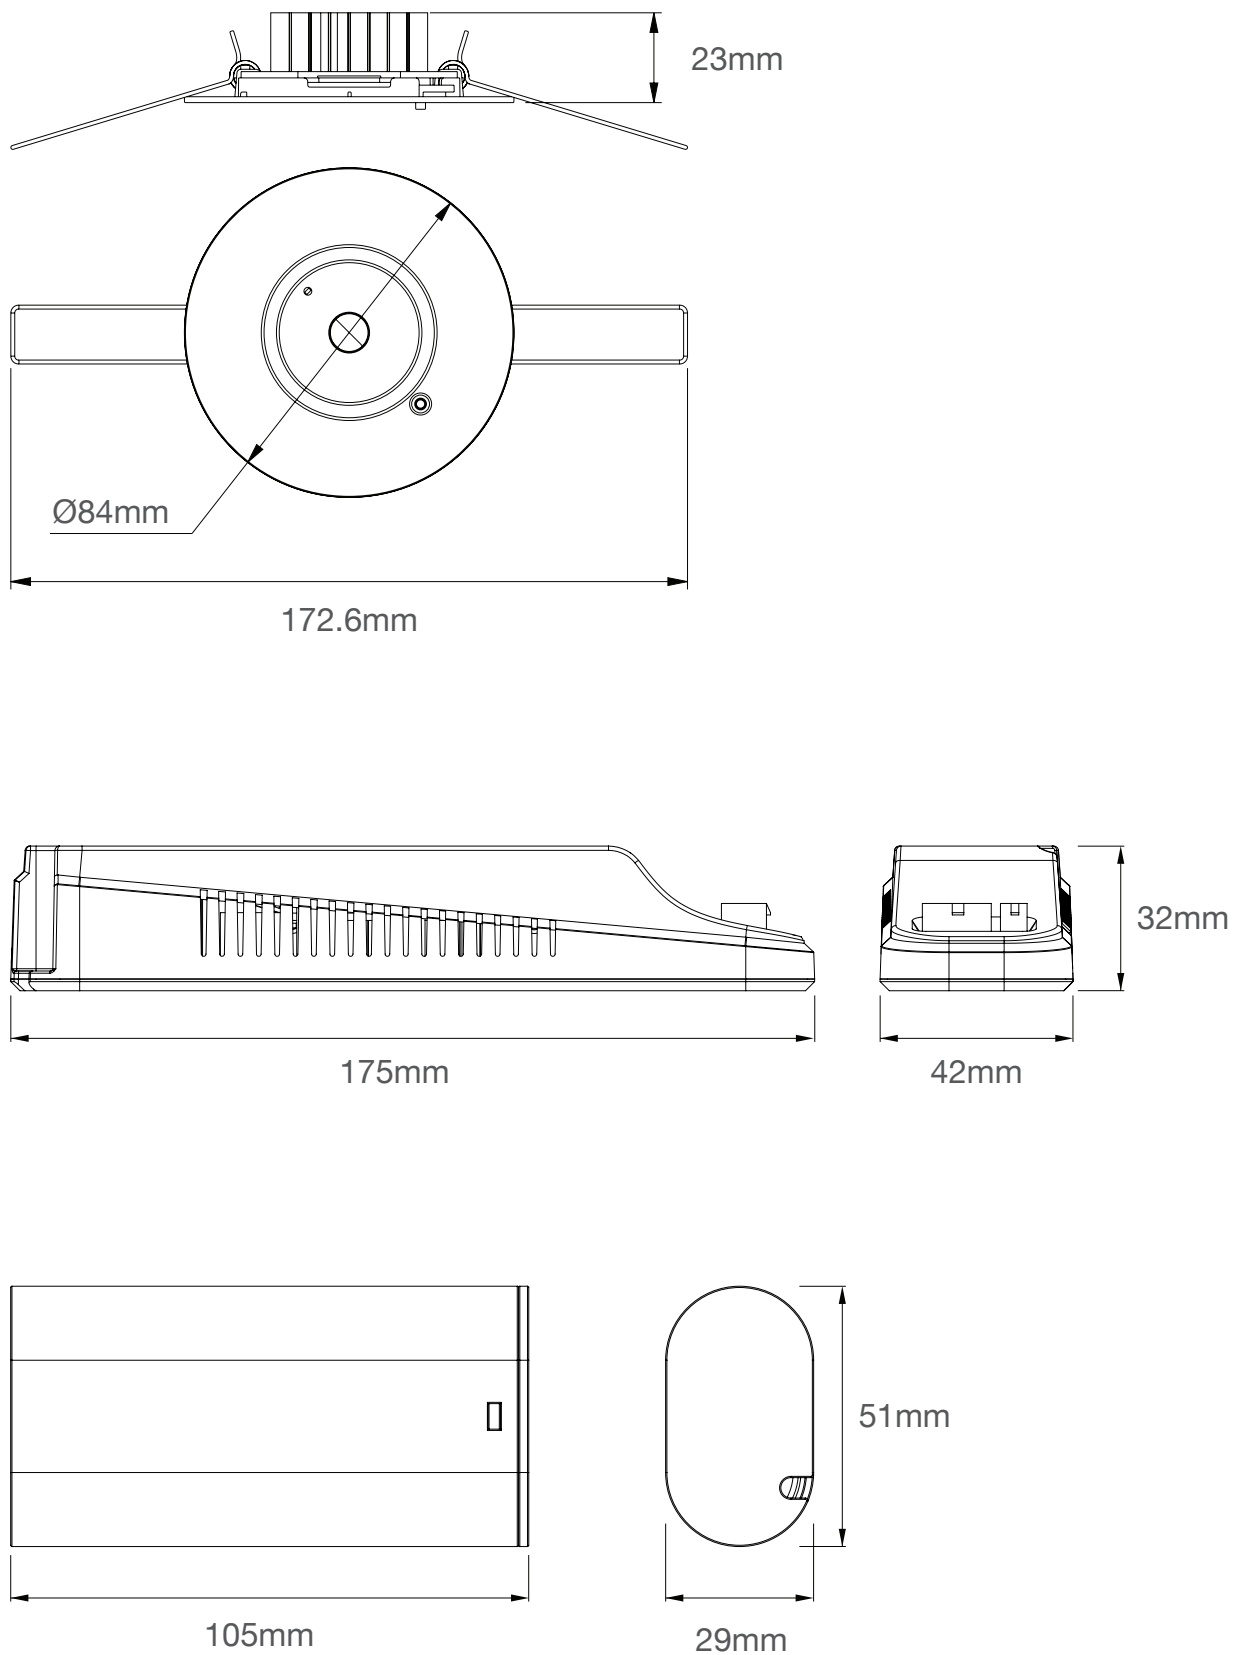

Specifications are subject to change without notice. Errors and omission excepted, always make sure to use the most recent release.

©2023 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED

www.traxon-ecue.com

3 of 4

LUXPOINT® Emergency Downlight - Werner

Ordering codes

Fixture

Short Text	lumen	Duration	Control	Beam Angle	Item code	EAN-13
LP DL 70 865 SY 1 ST RD	70 lm	1 HR	Self test	Symmetric	TXGL25100008155	4897135735305
LP DL 70 865 AY 1 ST RD	70 lm	1 HR	Self test	Asymmetric	TXGL25100008255	4897135735312
LP DL 70 865 SY 3 ST RD	70 lm	3 HR	Self test	Symmetric	TXGL25100008355	4897135735329
LP DL 70 865 AY 3 ST RD	70 lm	3 HR	Self test	Asymmetric	TXGL25100008455	4897135735336
LP DL 100 865 SY 1 ST RD	100 lm	1 HR	Self test	Symmetric	TXGL25100008555	4897135735343
LP DL 100 865 AY 1 ST RD	100 lm	1 HR	Self test	Asymmetric	TXGL25100008655	4897135735350
LP DL 100 865 SY 3 ST RD	100 lm	3 HR	Self test	Symmetric	TXGL25100008755	4897135735367
LP DL 100 865 AY 3 ST RD	100 lm	3 HR	Self test	Asymmetric	TXGL25100008855	4897135735374
LP DL 150 865 SY 1 ST RD	150 lm	1 HR	Self test	Symmetric	TXGL25100008955	4897135735381
LP DL 150 865 AY 1 ST RD	150 lm	1 HR	Self test	Asymmetric	TXGL25100009055	4897135735398
LP DL 150 865 SY 3 ST RD	150 lm	3 HR	Self test	Symmetric	TXGL25100009155	4897135735404
LP DL 150 865 AY 3 ST RD	150 lm	3 HR	Self test	Asymmetric	TXGL25100009255	4897135735411
LP DL 200 865 SY 1 ST RD	200 lm	1 HR	Self test	Symmetric	TXGL25100009355	4897135735428
LP DL 200 865 AY 1 ST RD	200 lm	1 HR	Self test	Asymmetric	TXGL25100009455	4897135735435
LP DL 200 865 SY 3 ST RD	200 lm	3 HR	Self test	Symmetric	TXGL25100009555	4897135735442
LP DL 200 865 AY 3 ST RD	200 lm	3 HR	Self test	Asymmetric	TXGL25100009655	4897135735459
LP DL 300 865 SY 1 ST RD	300 lm	1 HR	Self test	Symmetric	TXGL25100009755	4897135735466
LP DL 300 865 AY 1 ST RD	300 lm	1 HR	Self test	Asymmetric	TXGL25100009855	4897135735473
LP DL 300 865 SY 3 ST RD	300 lm	3 HR	Self test	Symmetric	TXGL25100009955	4897135735480
LP DL 300 865 AY 3 ST RD	300 lm	3 HR	Self test	Asymmetric	TXGL25100010055	4897135735497
LP DL 400 865 SY 1 ST RD	400 lm	1 HR	Self test	Symmetric	TXGL25100010155	4897135735503
LP DL 400 865 AY 1 ST RD	400 lm	1 HR	Self test	Asymmetric	TXGL25100010255	4897135735510
LP DL 400 865 SY 3 ST RD	400 lm	3 HR	Self test	Symmetric	TXGL25100010355	4897135735527
LP DL 400 865 AY 3 ST RD	400 lm	3 HR	Self test	Asymmetric	TXGL25100010455	4897135735534

Service contact:
 Traxon Technologies Ltd.
 Room 113, Wireless Centre, 3 Science Park East Avenue, Shatin,
 Hong Kong, China
www.traxon-ecue.com

Traxon Technologies Europe GmbH
 Karl-Schurz-Str. 38, 33100 Paderborn, Germany



TRAXON | **ecue**
 MEMBER OF PROSPERITY GROUP