



Light is creative
LUXPOINT®
Ceiling Light Catalogue



TRAXON | ecue

MEMBER OF PROSPERITY GROUP



Content

Ceiling Light

LUXPOINT® Round H26 LP XR1826	P.3
LUXPOINT® Round H65 LP XP105PM	P.4
LUXPOINT® Ring W50 H70 LP XR5070	P.6
LUXPOINT® Ring W35 H35 LP XR3535	P.8

Linear Light

LUXPOINT® Suspended Tubular D60 LP T60	P.11
LUXPOINT® Suspended Linear W35 H80 LP LS3580P	P.13
LUXPOINT® Suspended Linear W50 H80 LP LS5080PM	P.14
LUXPOINT® Suspended Linear W75 H100 LP LS75100P	P.15
LUXPOINT® Recessed Linear W48 H37 LP LR4737P	P.16
LUXPOINT® Recessed Linear W65 H37 LP LR6537P	P.17
LUXPOINT® Recessed Linear W90 H37 LP LR9037P	P.18



LUXPOINT® Round Series



LUXPOINT® Round H26



Applications


- Home
- Offices
- Restaurant
- Workshop
- hotel
- Shopping mall

Features


- Made of high purity of extrusion aluminum
- No visible screws
- With high efficiency PMMA
- Equipped with aluminum PCB for LED source
- Patented design to prevent light leak
- 100lm/W
- UGR<19
- Beam angle 80 °
- Long lifetime up to 50,000 hours
- Different Dimming option (0 -10V / DALI)
- Wide range of sizes and power

LUXPOINT® Round H26 available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19.

Dimensions

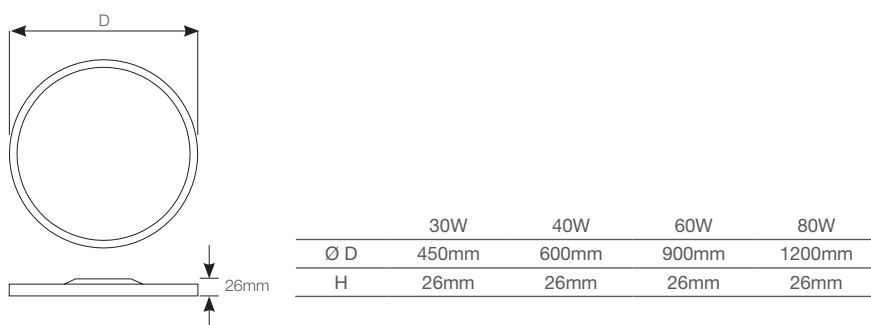

Mounting

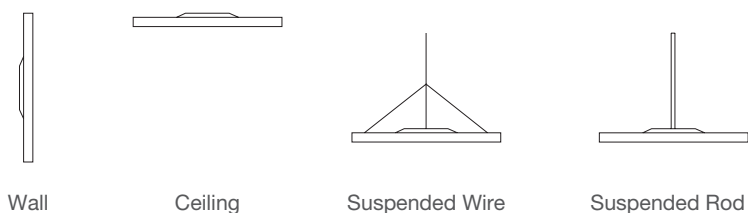

Product Configurator

LP XP 1826 Power CRI-CCT Dimmable Colors

Power & Dimension

30W	450mm x 26mm - 3000lm
40W	600mm x 26mm - 4000lm
60W	900mm x 26mm - 6000lm
80W	1200mm x 26mm - 8000lm

CRI-CCT

830
840
850
3CCT

Dimmable

0-10V
DALI

Colors

Black
White
Grey

Control	Voltage	Frequency	Beam angle
ON / OFF	220-240V~	50/60Hz	80°

LUXPOINT® Round H65



Applications



- Home
- Offices
- Restaurant
- Workshop
- hotel
- Shopping mall

Features

- Made of high purity of extrusion aluminum
- No visible screws
- With high efficiency PMMA
- Equipped with aluminum PCB for LED source
- Patented design to prevent light leak
- up to 110lm/W
- UGR<19
- Beam angle 80 °
- Long lifetime up to 50,000 hours
- Different Dimming option (0 -10V / DALI)
- Wide range of sizes and power

LUXPOINT® Round H65 available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19.

Dimensions



	30W	40W	60W	80W
Ø D	450mm	600mm	900mm	1200mm
H	65mm	65mm	65mm	65mm


Mounting




Wall



Ceiling



Suspended Wire



Suspended Rod

Product Configurator

LP XP105PM Power CRI-CCT Dimmable Colors

Power & Dimension

30W	450mm x 65mm - 3300lm
40W	600mm x 65mm - 4800lm
60W	900mm x 65mm - 7200lm
80W	1200mm x 65mm - 9600lm

CRI-CCT

830
840
850
3CCT

Dimmable

0-10V
DALI

Colors

Black
White
Grey

Control	Voltage	Frequency	Beam angle
ON / OFF	220-240V~	50/60Hz	80°



LUXPOINT®
Ring Series



LUXPOINT® Ring W50 H70



Applications

- Home
- Offices
- Restaurant
- Workshop
- hotel
- Shopping mall
- Public area


Features

- Made of high purity of extrusion aluminum
- No visible screws
- With high efficiency PMMA
- Equipped with aluminum PCB for LED source
- Patented design to prevent light leak
- 100lm/W
- UGR<19
- Beam angle 100°
- Long lifetime up to 50,000 hours
- Different Dimming option (0 -10V / DALI)
- Wide range of sizes and power


LUXPOINT® Ring W50 H70 is a sleek, energy-efficient lighting fixture that provides uniform illumination for ceilings and walls. Its minimalist design and various color temperatures make it a versatile choice for modern interiors, ensuring long-lasting performance and easy installation.

Dimensions

Round



Curve



A.

Wattage	30W	40W	60W
Ø D	600mm	900mm	1200mm
W	50mm	50mm	50mm
H	70mm	70mm	70mm

B.

Wattage	24W	32W	32W	32W	38W	39W	39W
Angle	90°	90°	60°	45°	90°	45°	23°
C	1178mm	1570mm	1570mm	1570mm	1884mm	1963mm	1963mm
W	50mm	50mm	50mm	50mm	50mm	50mm	50mm
H	70mm	70mm	70mm	70mm	70mm	70mm	70mm


Mounting



Wall



Ceiling



Suspended Wire



Product Configurator

LP XR5070

Shape Power CRI-CCT Dimmable Colors

Shape	Power & Dimension	CRI-CCT	Dimmable	Colors
Round	30W Ø600mm x 50mm x 70mm - 3000lm	830	1-10V	Black
	40W Ø900mm x 35mm x 35mm - 4000lm	840	DALI	White
	60W Ø1200mm x 35mm x 35mm - 6000lm	850		Grey
		3CCT		
Curve	24W C1178mm x 35mm x 35mm - 90° - 2400lm			
	32W C1570mm x 35mm x 35mm - 90° - 3200lm			
	32W C1570mm x 35mm x 35mm - 60° - 3200lm			
	32W C1570mm x 35mm x 35mm - 45° - 3200lm			
	38W C1884mm x 35mm x 35mm - 90° - 3800lm			
	39W C1963mm x 35mm x 35mm - 45° - 3900lm			
	39W C1963mm x 35mm x 35mm - 23° - 3900lm			

Control	Voltage	Frequency	Beam angle
ON / OFF	220-240V~	50/60Hz	100°

LUXPOINT® Ring W35 H35



Applications

- Home
- Offices
- Restaurant
- Workshop
- hotel
- Shopping mall
- Public area


Features

- Made of high purity of extrusion aluminum
- No visible screws
- With high efficiency PMMA
- Equipped with aluminum PCB for LED source
- Patented design to prevent light leak
- up to 130lm/W
- UGR<19
- Beam angle 100 °
- Long lifetime up to 50,000 hours
- Different Dimming option (0 -10V / DALI)
- Wide range of sizes and power


LUXPOINT® Ring W35 H35 is a sleek, energy-efficient lighting fixture that provides uniform illumination for ceilings and walls. Its minimalist design and various color temperatures make it a versatile choice for modern interiors, ensuring long-lasting performance and easy installation.

Dimensions

Round



Curve



A.

Wattage	30W	40W	60W
Ø D	600mm	900mm	1200mm
W	35mm	35mm	35mm
H	35mm	35mm	35mm


B.

Wattage	24W	32W	32W	32W	38W	39W	39W
Angle	90 °	90 °	60 °	45 °	90 °	45°	23°
C	1178mm	1570mm	1570mm	1570mm	1884mm	1963mm	1963mm
W	35mm	35mm	35mm	35mm	35mm	35mm	35mm
H	35mm	35mm	35mm	35mm	35mm	35mm	35mm


Mounting



Wall



Ceiling



Suspended Wire



Product Configurator

LP XR3535 Shape Power CRI-CCT Dimmable Colors

Shape	Power & Dimension	CRI-CCT	Dimmable	Colors
Round	30W Ø600mm x 35mm x 35mm - 3900lm	830	1-10V	Black
	40W Ø900mm x 35mm x 35mm - 5200lm	840	DALI	White
	60W Ø1200mm x 35mm x 35mm - 7800lm	850		Grey
		3CCT		
Curve	24W C1178mm x 35mm x 35mm - 90° - 3120lm			
	32W C1570mm x 35mm x 35mm - 90° - 4160lm			
	32W C1570mm x 35mm x 35mm - 60° - 4160lm			
	32W C1570mm x 35mm x 35mm - 45° - 4160lm			
	38W C1884mm x 35mm x 35mm - 90° - 4940lm			
	39W C1963mm x 35mm x 35mm - 45° - 5070lm			
	39W C1963mm x 35mm x 35mm - 23° - 5070lm			


Control	Voltage	Frequency	Beam angle
ON / OFF	220-240V~	50/60Hz	100°



LUXPOINT® Suspended Tubular



LUXPOINT® Suspended Tubular D60

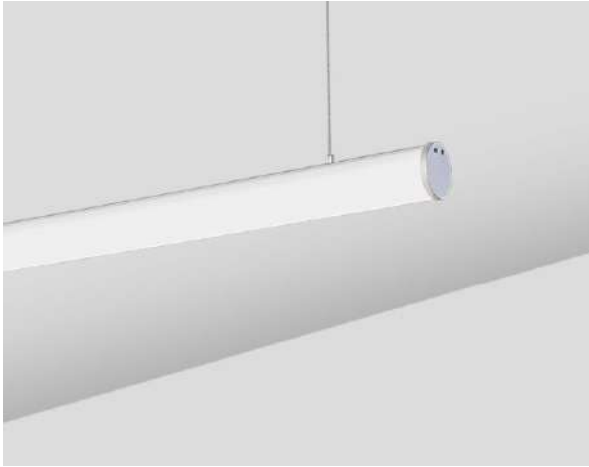

Applications


- Home
- Offices
- Workshop
- hotel
- Shopping mall
- Public area

Features

- 100lm/W
- No screw to be appeared
- Plastic end-caps
- Easy installation
- Beam angle 270°
- Long lifetime up to 50,000 hours
- Different Dimming option (0 -10V / DALI)
- Wide range of sizes and power

LUXPOINT® Suspended Tubular D60 is suitable for the modern pendant lighting. With a slim, modern and integrate design. The T6 series provide flexible, customizable solutions included office, hotel, shopping mall, workshops and other public lighting areas.

Dimensions

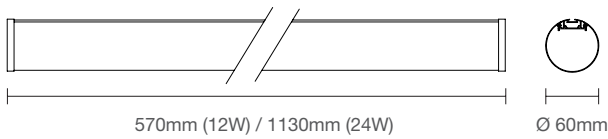

Product Configurator

LP T60 Power CRI-CCT Dimmable Colors

Power & Dimension		CRI-CCT	Dimmable
12W	570mm x Ø 60mm - 1200lm	830	0-10V
24W	1130mm x Ø 60mm - 2400lm	840	DALI
		850	
		3CCT	

Control	Voltage	Frequency	Beam angle
ON / OFF	220-240V~	50/60Hz	270°



LUXPOINT®
Linear Series



LUXPOINT® Suspended Linear W35 H80



Applications


- Home
- Offices
- Restaurant
- Studio

Features


- 90lm/W
- No screw to be appeared
- Easy to install
- Beam angle 100°
- Long lifetime up to 50,000 hours
- Different Dimming option (0 -10V / DALI)
- Wide range of sizes and power

LUXPOINT® Suspended Linear W35 H80 ideal for residential and commercial applications, it is easy to install and compatible with various LED lighting systems. By providing uniform illumination, it improves visual comfort and enhances the overall design of any space.


Dimensions

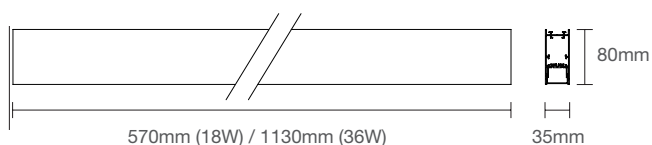


Details



Continuous

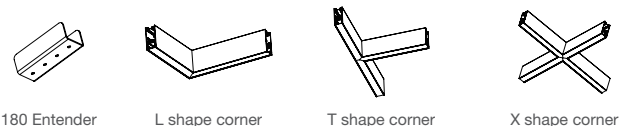

Accessories

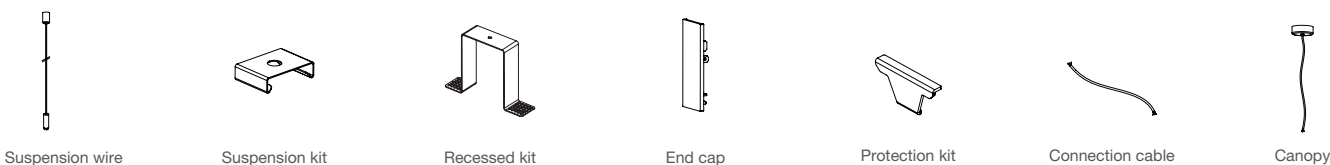

Product Configurator

LP LS 3580P **Power** **CRI-CCT** **Dimmable** **Colors**

Power & Dimension

18W	570mm x 35mm x 80mm - 1620lm
36W	1130mm x 35mm x 80mm - 3240lm

CRI-CCT

830
840
850
3CCT

Dimmable

0-10V
DALI

Colors

Black
White
Silver

Control Voltage Frequency Beam angle

ON / OFF	220-240V~	50/60Hz	100 °
----------	-----------	---------	-------



LUXPOINT® Suspended Linear W50 H80



Applications


- Home
- Offices
- Restaurant
- Studio

Features


- 100lm/W
- No screw to be appeared
- Easy to install
- Beam angle 100°
- Long lifetime up to 50,000 hours
- Different Dimming option (0 -10V / DALI)

LUXPOINT® Suspended Linear W50 H80 ideal for residential and commercial applications, it is easy to install and compatible with various LED lighting systems. By providing uniform illumination, it improves visual comfort and enhances the overall design of any space.


Dimensions

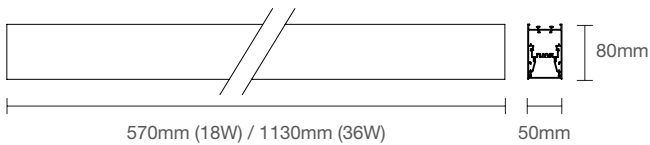


Details



Continuous

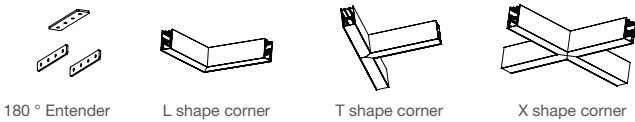

Accessories

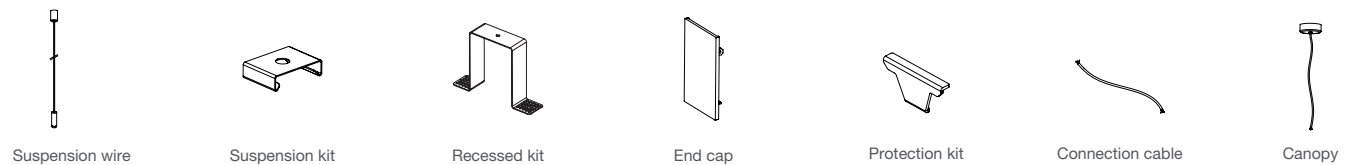

Product Configurator

LP LS 5080PM **Power** **CRI-CCT** **Dimmable** **Colors**

Power & Dimension

18W	570mm x 50mm x 80mm - 1800lm
36W	1130mm x 50mm x 80mm - 3600lm

CRI-CCT

830
840
850
3CCT

Dimmable

0-10V
DALI

Colors

Black
White
Silver

Control	Voltage	Frequency	Beam angle
ON / OFF	220-240V~	50/60Hz	100°



LUXPOINT® Suspended Linear W75 H100



Applications


- Home
- Offices
- Restaurant
- Studio

Features


- 100lm/W
- No screw to be appeared
- Easy to install
- Beam angle 100°
- Long lifetime up to 50,000 hours
- Different Dimming option (0 -10V / DALI)

LUXPOINT® Suspended Linear W75 H100 ideal for residential and commercial applications, it is easy to install and compatible with various LED lighting systems. By providing uniform illumination, it improves visual comfort and enhances the overall design of any space.

Dimensions

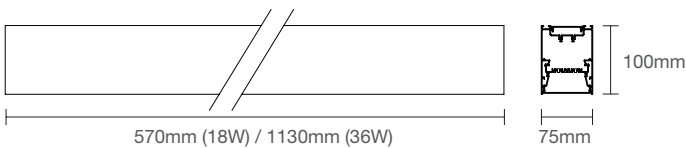


Details




Continuous




180 Entender



L shape corner



T shape corner



X shape corner

Accessories



Suspension wire



Suspension kit



Recessed kit



End cap



Protection kit



Connection cable



Canopy

Product Configurator

LP LS 75100P Power CRI-CCT Dimmable Colors

Power & Dimension

18W	570mm x 75mm x 100mm - 1800lm
36W	1130mm x 75mm x 100mm - 3600lm

CRI-CCT

830
840
850
3CCT

Dimmable

0-10V
DALI


Colors

Black
White
Silver

Control	Voltage	Frequency	Beam angle
ON / OFF	220-240V~	50/60Hz	100 °



LUXPOINT® Recessed Linear W48 H37

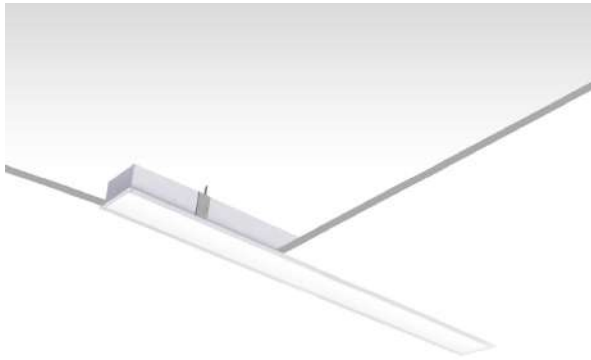

Applications


- Home
- Offices
- Restaurant
- Studio

Features


- 90lm/W
- No screw to be appeared
- Easy to install
- Beam angle 100°
- Long lifetime up to 50,000 hours
- Different Dimming option (0 -10V / DALI)

LUXPOINT® Recessed Linear W48 H37 ideal for residential and commercial applications, it is easy to install and compatible with various LED lighting systems. By providing uniform illumination, it improves visual comfort and enhances the overall design of any space.


Dimensions

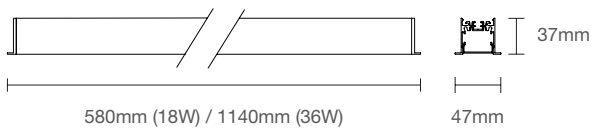


Details

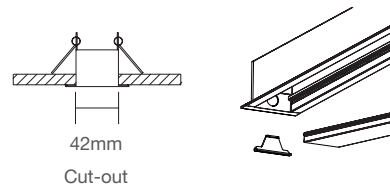

Continuous



Accessories

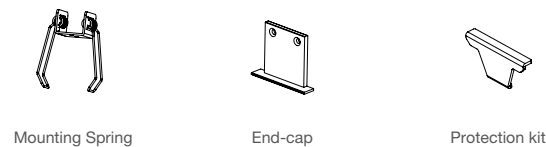

Product Configurator


LP LR 4737P Power CRI-CCT Dimmable Colors

Power & Dimension	CRI-CCT	Dimmable	Colors
18W 580mm x 47mm x 37mm - 1620lm	830	0-10V	Black
36W 1140mm x 47mm x 37mm - 3240lm	840	DALI	White
	850		Silver
	3CCT		

Control	Voltage	Frequency	Beam angle
ON / OFF	220-240V~	50/60Hz	100°



LUXPOINT® Recessed Linear W65 H37

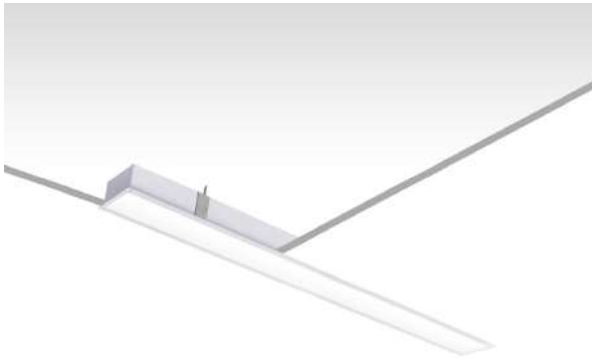

Applications


- Home
- Offices
- Restaurant
- Studio

Features


- 90lm/W
- No screw to be appeared
- Easy to install
- Beam angle 100°
- Long lifetime up to 50,000 hours
- Different Dimming option (0 -10V / DALI)

LUXPOINT® Recessed Linear W65 H37 ideal for residential and commercial applications, it is easy to install and compatible with various LED lighting systems. By providing uniform illumination, it improves visual comfort and enhances the overall design of any space.


Dimensions

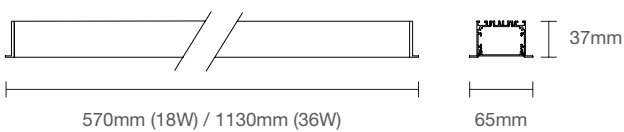


Details

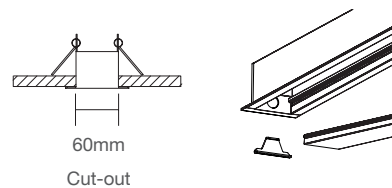

Continuous

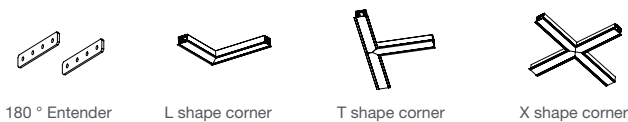

Accessories

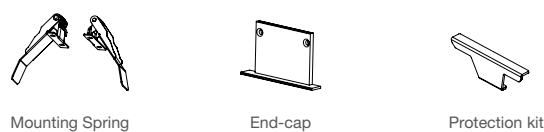


Product Configurator

LP LR 6537P Power CRI-CCT Dimmable Colors

Power & Dimension	CRI-CCT	Dimmable	Colors
18W 580mm x 65mm x 37mm - 1620lm	830	0-10V	Black
36W 1140mm x 65mm x 37mm - 3240lm	840	DALI	White
	850		Grey
	3CCT		

Control	Voltage	Frequency	Beam angle
ON / OFF	220-240V~	50/60Hz	100°

LUXPOINT® Recessed Linear W90 H37

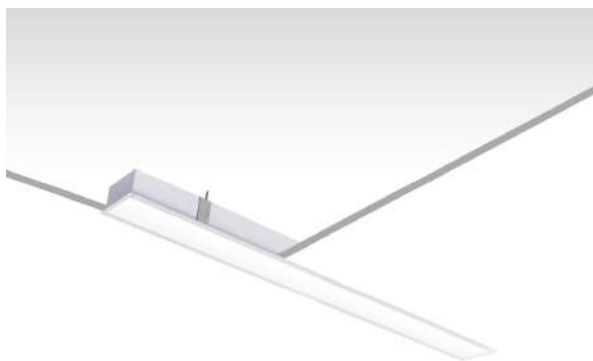

Applications

- Home
- Offices
- Restaurant
- Studio

Features


- 90lm/W
- No screw to be appeared
- Easy to install
- Beam angle 100°
- Long lifetime up to 50,000 hours
- Different Dimming option (0 -10V / DALI)

LUXPOINT® Recessed Linear W90 H37 ideal for residential and commercial applications, it is easy to install and compatible with various LED lighting systems. By providing uniform illumination, it improves visual comfort and enhances the overall design of any space.


Dimensions




Details

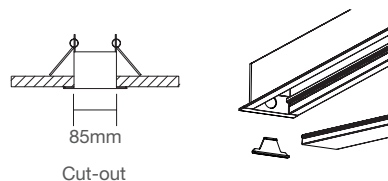

Continuous

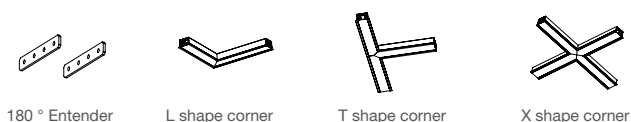

Accessories

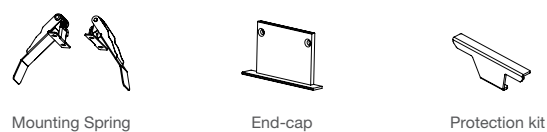

Product Configurator

LP LR 9037P Power CRI-CCT Dimmable Colors

Power & Dimension		CRI-CCT	Dimmable	Colors
18W	580mm x 90mm x 37mm - 1620lm	830	0-10V	Black
36W	1140mm x 90mm x 37mm - 3240lm	840	DALI	White
		850		Grey
		3CCT		

Control	Voltage	Frequency	Beam angle
ON / OFF	220-240V~	50/60Hz	110 °

Traxon Technologies Ltd.

Room 113, Wireless Centre, 3 Science Park East Avenue, Shatin, Hong Kong, China
www.traxon-ecue.com

Traxon Technologies Europe GmbH

Karl-Schurz-Str. 38, 33100 Paderborn, Germany

OSRAM is a trademark of OSRAM GmbH.
Traxon is a licensee of product trademark OSRAM for a fixed list of General Lighting product.



POPP LIGHTING S.L.

Calle Virgilio Leret, 30, 28984 Parala, Madrid, Spain
info@popplighting.com
+34 910 669 872